




TBG 750 LX MC





TBG 750 LX ME

	TBG 750 LX MC	TBG 750 LX ME	TBG 750 LX ME V	TBG 750 LX ME V O2	TBG 750 LX ME V CO
Gas burner compliant with European standard EN676. Operation:	mechanical two-stage progressive	electronic two-stage progressive	modulating electronic	modulating electronic	modulating electronic
Continuous modulation operation by installing P.I.D. controller in the control panel (to be ordered separately with modulation probe).	•	•			
Modulation ratio:	1:12	1:12	1:12	1:12	1:12
Low NOx and CO emissions gas burner according to European standard EN676:	class 3	class 3	class 3	class 3	class 3
Adjusting the combustion head.	•	•	•	•	•
Maintenance facilitated by the possibility of removing the mixing unit without having to remove the burner from the boiler.	•	•	•	•	•
Fixed boiler coupling flange.	•	•	•	•	•
Easy maintenance thanks to the two-sides hinge which allows the removal of the combustion head without having to remove the burner from the boiler.	•	•	•	•	•
Combustion air intake with butterfly valve. Air flow adjustment:	mechanical cam	electric servomotor	electric servomotor	electric servomotor	electric servomotor
Fully closing air damper on shutdown to avoid loss of heat through the chimney.	•	•	•	•	•
Device made of sound-absorbing material to reduce fan noise.	•	•	•	•	•
Adjustment of fan revolutions according to working stage by means of a frequency converter in order to reduce noise and electric consumption.			•	•	•
Residual oxygen (O ₂) monitoring in the fumes in order to maintain an optimal air/fuel ratio and ensure increased performance.				•	
Residual oxygen (O ₂) and carbon monoxide (CO) and monitoring of oxidizing components (H ₂) in fumes to ensure increased performance and less atmospheric pollution.					•
CE version gas train is complete with butterfly valve, operation and safety valve with electromagnetic drive, valve tightness control, minimum and maximum pressure switch, pressure regulator and gas filter.	•	•	•	•	•
Fail proof connectors for burner/gas train connection.	•	•	•	•	•
Gas train outlet:	up/down	up/down	up/down	up/down	up/down
Flame detection by ionisation electrode with connector for microamperometer.	•	•	•	•	•
Control panel with display diagram for working mode with indication lights.	•				
Control panel equipped either with display showing the working process and with the keyboard for the burner adjustment.		•	•	•	•
Electric protection rating:	IP54	IP54	IP54	IP54	IP54

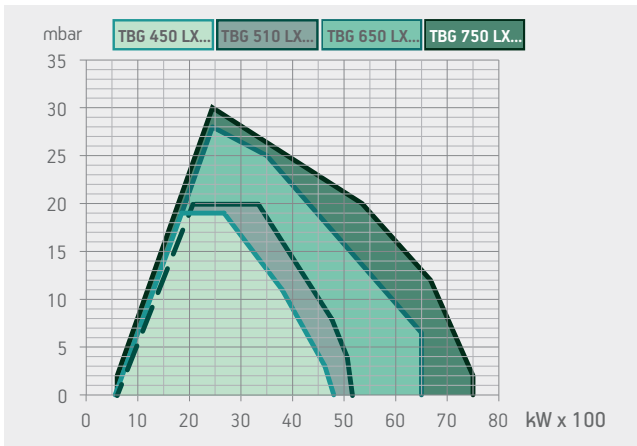

Model	Size of packaging			Weight kg
	L	P	H	
TBG 750 LX MC	1500	1300	970	310
TBG 750 LX ME	1500	1300	970	310
TBG 750 LX ME V	1500	1300	970	330
TBG 750 LX ME V O2	1500	1300	970	342
TBG 750 LX ME V CO	1500	1300	970	354

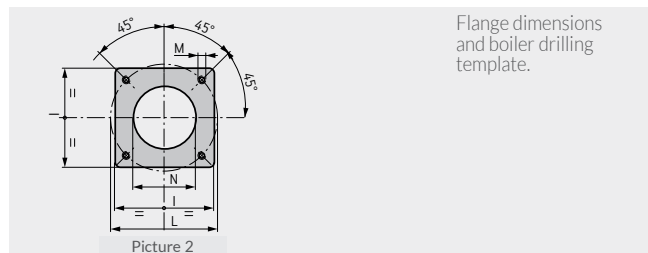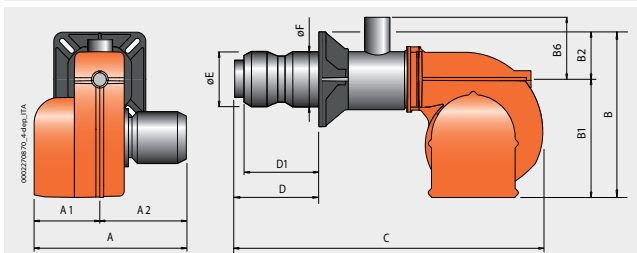

Model	A mm	A1 mm	A2 mm	B mm	B1 mm	B2 mm	B6 mm	C mm	D mm	D1 mm	E mm	F mm	I mm	L mm	M mm	N mm	Pic.
TBG 750 LX MC	1180	530	650	810	525	285	295	1800	650	547 ÷ 597	397	410	480	520 ÷ 600	M20	415	2
TBG 750 LX ME	1180	530	650	810	525	285	295	1850	650	547 ÷ 597	397	410	480	520 ÷ 600	M20	415	2
TBG 750 LX ME V	1180	530	650	810	525	285	295	1850	650	547 ÷ 597	397	410	480	520 ÷ 600	M20	415	2
TBG 750 LX ME V O2	1180	530	650	810	525	285	295	1850	650	547 ÷ 597	397	410	480	520 ÷ 600	M20	415	2
TBG 750 LX ME V CO	1180	530	650	810	525	285	295	1850	650	547 ÷ 597	397	410	480	520 ÷ 600	M20	415	2

	Inverter	O ₂	CO	Emissions class	Thermal output kW	Model	Part no.	Electrical supply kW	Motor	Note
Frequency 50 Hz										
NEW				class 3	600 ÷ 7500	TBG 750 LX MC	18190010	3N AC 50Hz 400V	18,5	4)
NEW				class 3	600 ÷ 7500	TBG 750 LX ME	18200010	3N AC 50Hz 400V	18,5	4)
NEW	•			class 3	600 ÷ 7500	TBG 750 LX ME V	18200015	3N AC 50Hz 400V	18,5	4) 10)
NEW	•	•		class 3	600 ÷ 7500	TBG 750 LX ME V O2	18200016	3N AC 50Hz 400V	18,5	4) 10)
NEW	•	•	•	class 3	600 ÷ 7500	TBG 750 LX ME V CO	18200017	3N AC 50Hz 400V	18,5	4) 10)
Frequency 60 Hz										
NEW				class 3	600 ÷ 7500	TBG 750 LX MC	on request	3N AC 60Hz 380V	18,5	4)
NEW				class 3	600 ÷ 7500	TBG 750 LX ME	on request	3N AC 60Hz 380V	18,5	4)
NEW	•			class 3	600 ÷ 7500	TBG 750 LX ME V	on request	3N AC 60Hz 380V	18,5	4) 10)
NEW	•	•		class 3	600 ÷ 7500	TBG 750 LX ME V O2	on request	3N AC 60Hz 380V	18,5	4) 10)
NEW	•	•	•	class 3	600 ÷ 7500	TBG 750 LX ME V CO	on request	3N AC 60Hz 380V	18,5	4) 10)

TO COMPLETE THE BURNER

DESCRIPTION	PART NO.
TBG 750 ME V: modulating probe for LCM 100 (see page 294)	

MODULATING MODE

DESCRIPTION	PART NO.
TBG 750 MC: modulation kit	98000055
TBG 750 ME: modulation kit	98000059
TBG 750 MC/750 ME: modulating probe (see page 294)	

ACCESSORIES AVAILABLE ON REQUEST

DESCRIPTION	PART NO.
Soundproof burner cover (see page 299)	97980058

GAS BURNERS ACCESSORIES

Boiler coupling kit.

NOTES

- 4 Equipped with air closure device.
- 10 Inverter supplied separately, not included on the machine.
- Net calorific value at reference conditions of 0°C, 1013mbar:
- Natural gas: Hi = 35,80 MJ/m³ = 8550 kcal/m³,
- For different type of gas and pressure values, please get in contact with our commercial department.